


HORIBA LA-920 for Windows(TM) [WET(LA-920)] Ver.3.70

LA-920 system for Windows

Circulation Speed : 7
 Ultra sonic : 02:00 (4)
 Laser T% : 90.7(%)
 Lamp T% : 87.8(%)
 Form of Distribution : Standard
 Distribution Base : Volume
 R.R.Index : 165a010i
 Sample Name : D605

S.P. Area : 73031(cm²/cm³)
 Median : 0.9469(μm)
 Diameter on % : (1)3.000 (%) - 0.3505(μm)
 (2)10.00 (%) - 0.4720(μm)
 (3)20.00 (%) - 0.5900(μm)
 (4)30.00 (%) - 0.6971(μm)
 (5)40.00 (%) - 0.8109(μm)
 (6)60.00 (%) - 1.0993(μm)
 (7)70.00 (%) - 1.2930(μm)
 (8)80.00 (%) - 1.5535(μm)
 (9)90.00 (%) - 1.9646(μm)
 (10)97.00 (%) - 2.6257(μm)
 Mean : 1.1055(μm)

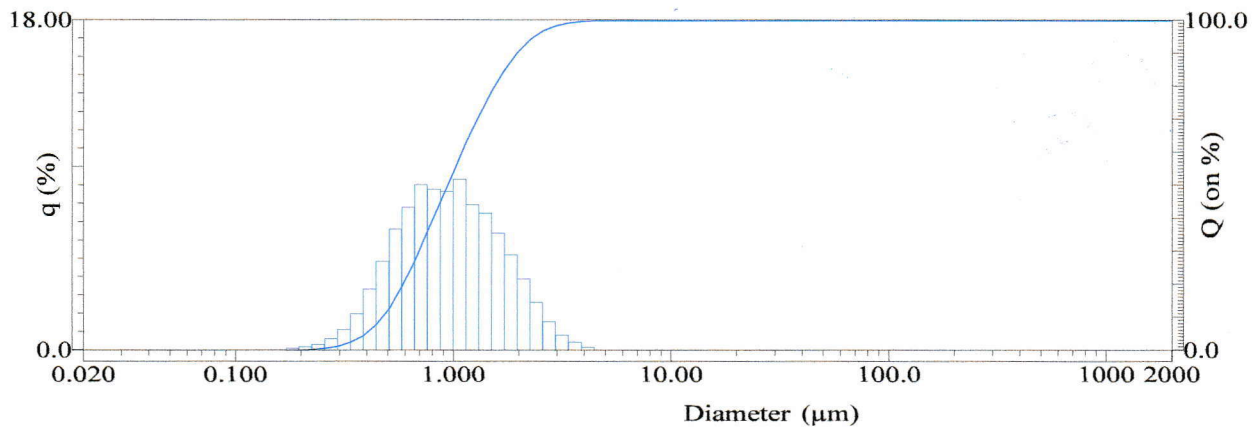

No.	Diameter(μm)	q (%)	Upper %	No.	Diameter(μm)	q (%)	Upper %	No.	Diameter(μm)	q (%)	Upper %	N
1	0.022	0.000	0.000	19	0.259	0.361	0.700	37	2.976	1.597	98.475	5
2	0.026	0.000	0.000	20	0.296	0.662	1.362	38	3.409	0.860	99.334	5
3	0.029	0.000	0.000	21	0.339	1.152	2.514	39	3.905	0.470	99.804	5
4	0.034	0.000	0.000	22	0.389	2.016	4.530	40	4.472	0.196	100.000	5
5	0.039	0.000	0.000	23	0.445	3.356	7.886	41	5.122	0.000	100.000	5
6	0.044	0.000	0.000	24	0.510	4.887	12.773	42	5.867	0.000	100.000	6
7	0.051	0.000	0.000	25	0.584	6.629	19.402	43	6.720	0.000	100.000	6
8	0.058	0.000	0.000	26	0.669	7.824	27.226	44	7.697	0.000	100.000	6
9	0.067	0.000	0.000	27	0.766	9.069	36.295	45	8.816	0.000	100.000	6
10	0.076	0.000	0.000	28	0.877	8.812	45.107	46	10.097	0.000	100.000	6
11	0.087	0.000	0.000	29	1.005	8.695	53.802	47	11.565	0.000	100.000	6
12	0.100	0.000	0.000	30	1.151	9.367	63.169	48	13.246	0.000	100.000	6
13	0.115	0.000	0.000	31	1.318	7.964	71.133	49	15.172	0.000	100.000	6
14	0.131	0.000	0.000	32	1.510	7.519	78.652	50	17.377	0.000	100.000	6
15	0.150	0.000	0.000	33	1.729	6.417	85.070	51	19.904	0.000	100.000	6
16	0.172	0.000	0.000	34	1.981	5.246	90.316	52	22.797	0.000	100.000	7
17	0.197	0.126	0.126	35	2.269	3.918	94.234	53	26.111	0.000	100.000	7
18	0.226	0.212	0.338	36	2.599	2.644	96.877	54	29.907	0.000	100.000	7